

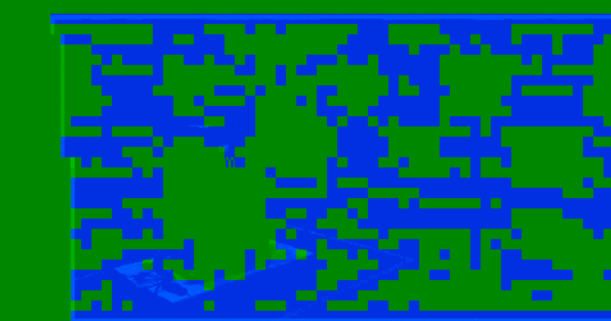


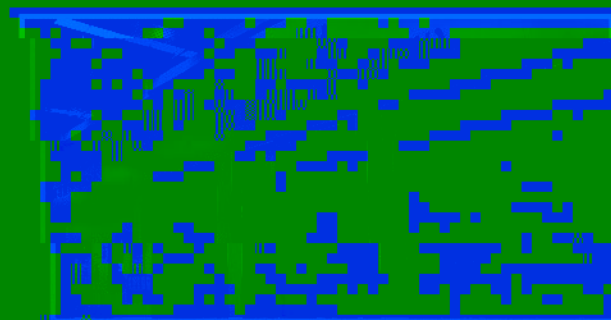

# 汉钟 HANBELL

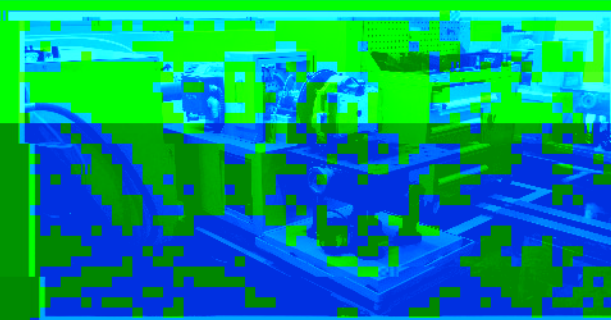

## “品质、环境、安全政策”

### “Quality, Eco-friendly, Safety”

- 品质挂帅，物超所值  
Excellent quality, reasonable price
- 顾客满意，安全高效  
Customer satisfaction, safety and efficiency
- 节能减排，生态环境  
Energy-saving, eco-friendly
- 遵纪守法，不断改善  
Observe law, keep improving



## 目录 CATALOG

- 01 汉钟精机简介  
About Us
- 03 无油涡旋式压缩机原理  
Working Principle
- 04 无油涡旋机组设计特点  
Design Features
- 05 无油涡旋机组技术参数表  
Technical Specifications
- 06 应用领域  
Application
- 07 销售、服务网络  
Sales And Service Network



无油涡旋式压缩机原理  
Working Principle

无油涡旋压缩机设计特点  
Design Features

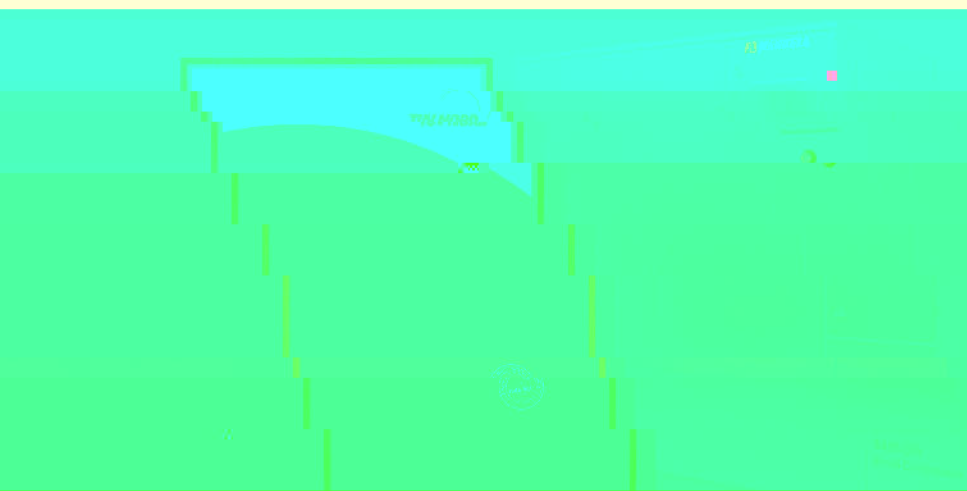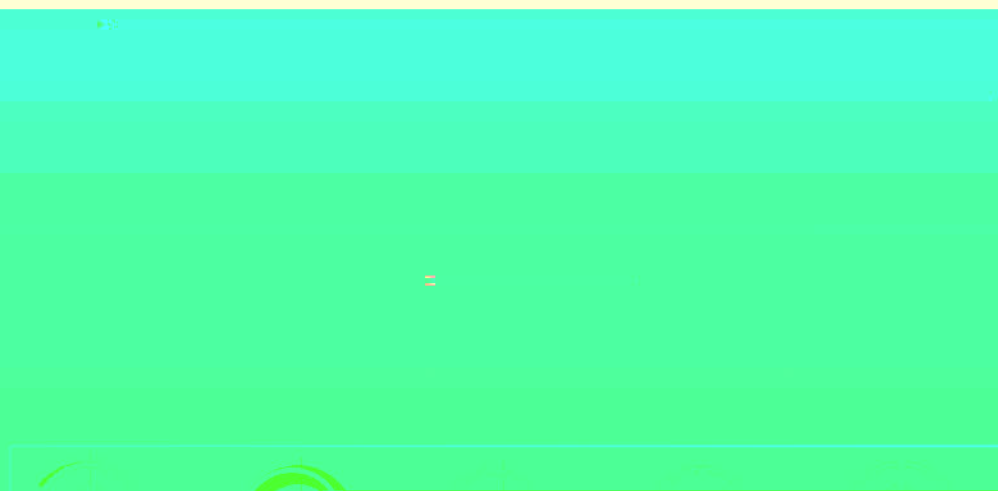

SAM系列无油涡旋空气压缩机参数表

Technical Specifications

型号 Model	电机功率 Motor Capacity (kW)	排气压力 Discharge Pressure (bar)	容积流量 Capacity FAD (L/min)	出口尺寸 Outlet size (inch)	噪音 Noise dB(A)	机组净重 Net weight (kg)	机组外形尺寸 Dimensions (L*W*H)mm
SAM-04A	3.7	8	410	G 1/2"	65	210	700*650*920
		10	335				
		8	410	G 3/4"	53	230	700*650*920
		10	355				
SAM-06A	5.5	8	610	G 3/4"	65	250	730*650*1020
				G 1/2"	58	300	718*718*1080
SAM-08A	3.7*2	8	820	G 3/4"	65	450	1350*818*1100
SAM-11A	5.5*2	8	1220	G 1"	62	500	1350*818*1100
SAM-15A	5.5*4	8	1640	G 1"	67	600	1500*818*1800
		10	1420				
SAM-16A	5.5*3	8	1830	G 1"	66	600	1500*818*1400
SAM-22A	5.5*4	8	2440	G 1-1/4"	67	750	1500*818*1800

1、SAM-04/06A可选配内置不锈钢储气罐，容积：15L；

SAM-04/06A can be optionally equipped with a built-in stainless steel gas storage tank with a capacity of 15L;

2、噪音值测试角费射，在正隔音室空跑测得正面上5m处测得值。根据实际运行工况的不同，或受周围环境影响以及实际设置状态的影响，所测数值将略有偏差。

the noise value is tested when the unit is at full load, and it is measured at a distance of 1.5m from the front of the unit in the anechoic room. The measured values may deviate slightly depending on the actual operating conditions, or the actual influence of the actual running conditions and the actual setting status.

3、上述技术参数依据ISO1217，吸气温度：20℃；相对湿度：60%；吸气压力：0.1MPa。

The above technical parameters measured according to ISO1217, Air inlet temperature: 20℃; Relative humidity: 60%; Inlet pressure: 0.1MPa.

4、标准电压为380V，三相，50Hz，若有需求其他规格，请洽汉钟销售人员。

Standard voltage 380V, three-phase, 50 hz. If you need other specifications, please contact Hanbell sales staff

5、若有其他功率机型之需求，请洽汉钟销售人员。

If you need other power models, please contact Hanbell sales staff

6、本公司持有所有相关设备设计专利权，最终参数以实际为准。

The company holds the right to design and modify all specifications, and the final specifications are based on the machine entity

应用领域

Application



45店(汽车喷漆)/新能源大巴(制动、压缩空气)  
45 shop (car spray painting) / 新能源大巴(制动、压缩空气)



医疗器械(牙医、制氧等医疗气源)  
Medical instruments (dental, oxygen and other medical sources)



电子工业(装配清洁用气)  
Electronics industry (assembly, cleaning, gas)




制药工业(制药业的搅拌)  
Pharmaceutical industry (agitation of pharmaceuticals)




食品工业(酿造业的搅拌)  
Food industry (agitation of brewing industry)



纺织工业(喷气织机)  
Textile industry (air-jet looms)

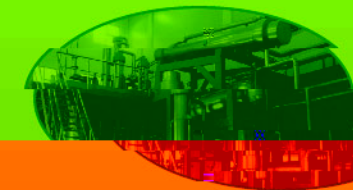

气体分离设备(吸附剂分离制氧、制氮)  
Gas separation equipment (adsorbent separation of oxygen, nitrogen)

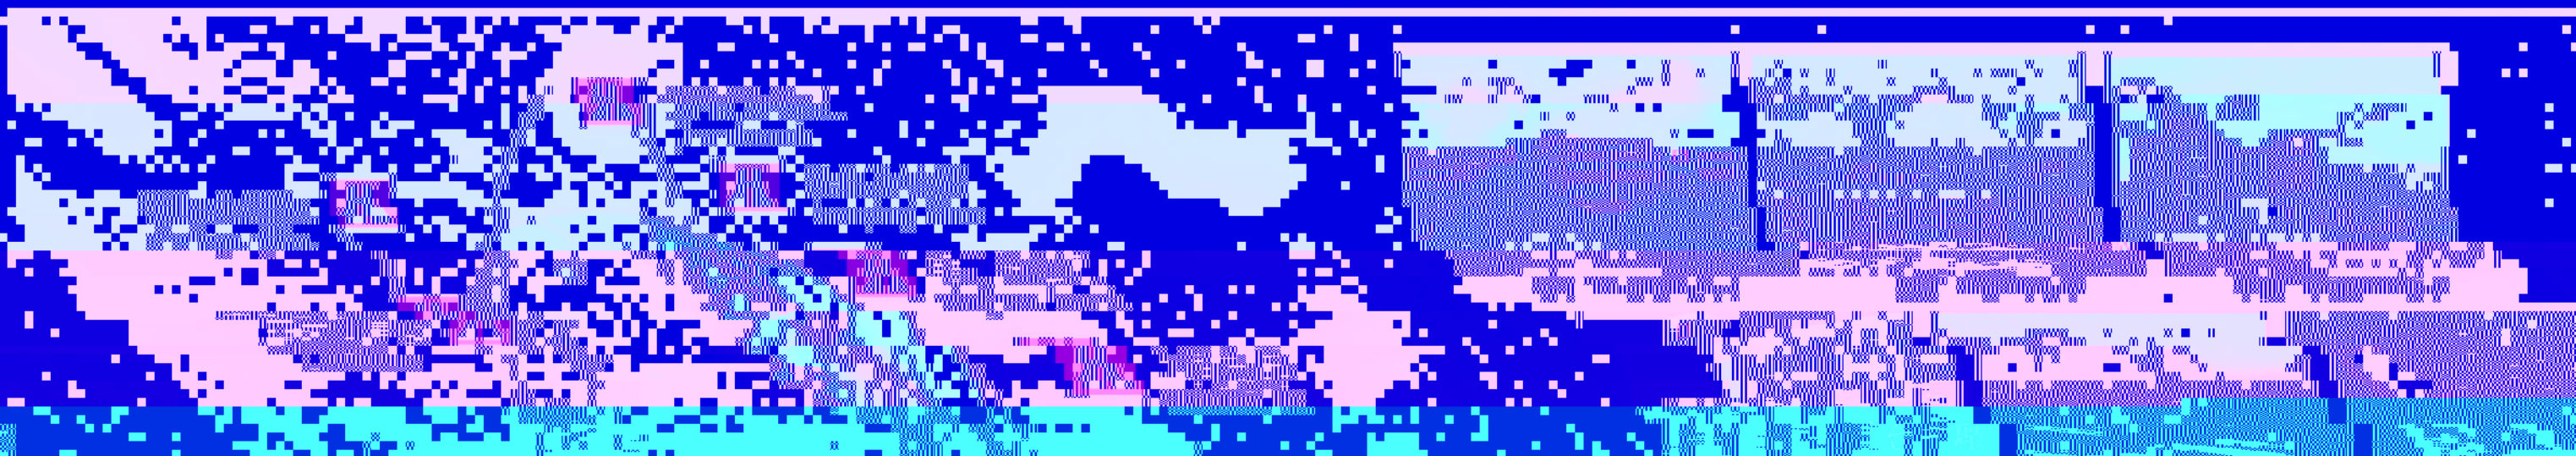

YINRIBELL

YINRIBELL

YINRIBELL